



The latest digital technology

TRIGGER MASTER

Full AEG Fire Control Computer

trigger-master.com

TRIGGER MASTER MARK III

With the Trigger Master your gun will now be capable of this **and more**:



New Screw Terminals reduce the need for soldering, for easier installation!

- x **Safe-Semi-Full**
- x **Safe-Semi-Burst**
- x **Safe-Semi-Burst/Full** (Hold trigger down after a burst to go fullauto)
- x **Safe-Semi-Semi** (semi-only)
- x **Semi-only with shot delay** (Forced delay for Sniper/DM guns)
- x **Safe-Burst-Full** (New Bonus mode!)
- x **Smart Rate-of-fire** option! (New!)


- 100% MOSFET Technology
- Only the best! Can deliver **450A peak**, and **60A sustained!**
- Active Braking
- Battery monitoring
- Low-battery warning
- Soft-start of motor for reduced wear
- *Automatic* sensing of all gear timing!

- **Li-Po compatible out-of-the-box!**
- Adjustable rate-of-fire motor speed
- **Adjustable burst length** (default is 3-round bursts)
- Advanced configuration functions are now even easier to use!
- Let it "just work", or try the options!

WIRING REFERENCE INFO - KEEP THIS PAGE


Normal AEG Wiring

Trigger contacts connect power directly to motor when trigger is pulled.

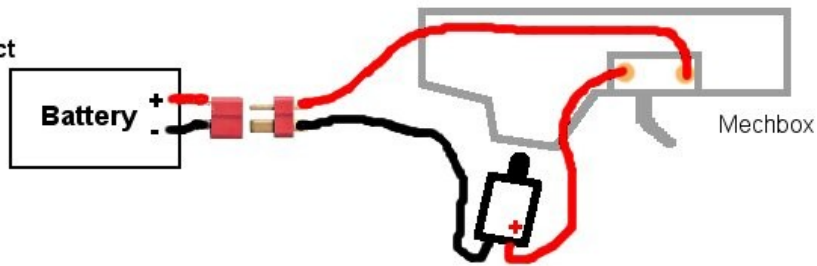


Trigger Master Wiring

Battery, Motor, and Trigger wire pairs all connect directly to MOSFET terminals

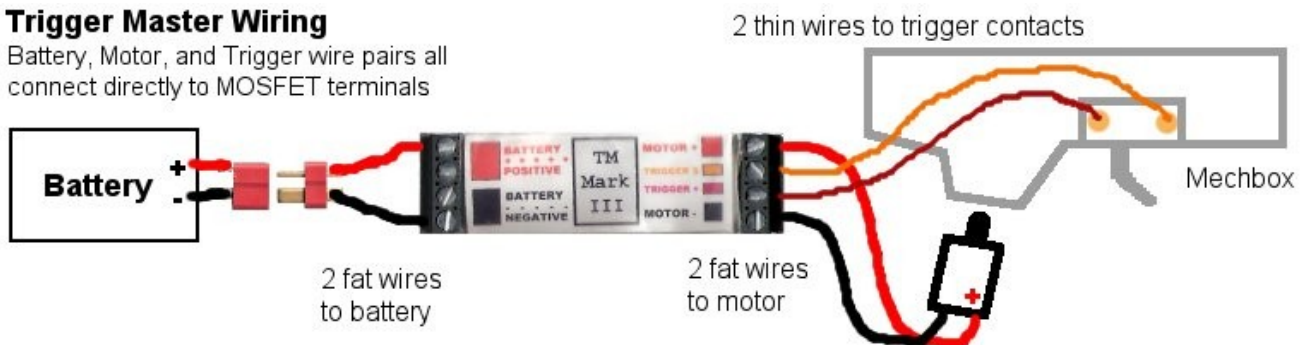


Screw-Terminal Connector Identification

Battery +
Battery +
Battery -
Battery -



Motor +
Trigger S
Trigger +
Motor -

Your Trigger Master has a label indicating which screw terminal is which. This is how it looks with the label removed.

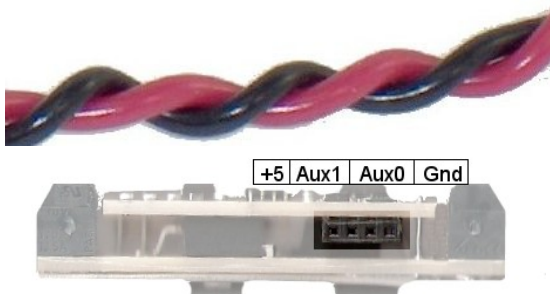

Twist together wire pairs (+ and -) whenever possible and practical. Doing this greatly reduces the electrical noise generated by the gun's operation.

AUX connector (for developers only): The aux connector is on the side. This socket is not used except for special purposes and may be ignored for normal use.

Deans Connectors

Positive

+



Negative

-

If you are using Deans connectors in your installation, ensure you follow the wiring and polarity standard shown in the diagram. Female connector is for power sources (like the battery.)

Note that the plug housings have "+" and "-" marked on the plastic where you will solder the wires. Insulate the wire connections with heat shrink.

To Trigger Master



To Battery



Motor Connectors



Straight



Right-Angle

If you ordered AEG Motor Spade Connectors, they come in two styles: straight and right-angle. Use the pair that matches your motor and gun.

These connectors fit onto the + and - terminals of an AEG motor. If you do not have a proper crimping tool, it is recommended that you fold the crimp ends around the motor wires, then solder them. Use heat-shrink tubing to cover and insulate the connectors to prevent shorts.